



QuickTask™ Mop, TASK0500

The QuickTask™ range consists of a variety of flat mop heads that can be easily attached to a choice of flat mop frame and handle assemblies.

The TASK0500 and TASK0550 mop heads are constructed from a hydroentangled polyester/cellulose nonwoven fabric with a synthetic fiberfill core. This provides a highly sorbent mop head which is suitable for the removal of light soil, residues and biofilms. Designed for single use, the mop heads are compatible with a wide range of chemicals and disinfectants.

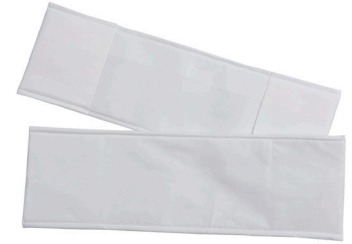


Features	Benefits
Highly sorbent fabric construction	<ul style="list-style-type: none"> Allows for removal of light soils, residues, and biofilms Very absorbent and drip-free Compatible with most common solutions, solvents and disinfectants
Polyester/cellulose cover over a polyester fiberfill core	<ul style="list-style-type: none"> Makes it ideal for cost-effective single use
Available gamma irradiated and validated sterile to a Sterility Assurance Level of 10 ⁻⁶	<ul style="list-style-type: none"> Suitable for all grades of pharmaceutical cleanrooms

Part No.	Description	Packaging
TASK0500	QuickTask Polyester/cellulose Mop Head, 16" x 5" (41x13cm)	4/bag; 12 bags/case
TASK0550	QuickTask Irradiated Polyester/cellulose Mop Head, 16" x 5" (41x13cm)	1/bag; 40 bags/case
2740	QuickTask Polypropylene Mop Frame, 16" x 4.25" (41x11cm) Compatible with handle 2725E with adapter 2758	1/case
2699P	QuickTask Polypropylene Magnetic Mop Frame, 15.5" x 3.75" (40x10cm)	1/case
2906	QuickTask Stainless Steel Magnetic Mop Frame, 15.5" x 3.75" (40x10cm)	1/case

Product Information

Mop materials	Nonwoven polyester/cellulose cover; Synthetic fiberfill core
Mop construction	Multilayer sewn lamination/sealed border
Packaging Materials	Outer bags (OB1, OB2, OB3), low density polyethylene (LDPE) Case (CS), corrugated fiberboard (PAP)
Dimensions; inches (cm)* As packaged; nominal: Mounted on frame:	15.5" x 5.25" (39.4x13.3cm) 16" x 4.5" (41x11.5cm)
Environment	ISO 5-8 Grade A/B for sterile, C/D for nonsterile
Compatible mop frames	2906 (stainless steel), 2699P (autoclavable polypropylene) and 2740 (PP) (autoclavable polypropylene)
Sterile	Available gamma irradiated at 25 kGy
Shelf life	Sterile: 2 years from manufacturing date


Technical Data

Attribute (units)	Typical Value	Test Method
Mop weight, dry; (g)	31	CTM004-03
Sorbent capacity; (mL/mop)	352	CTM004-03
Particles $\geq 0.5\mu\text{m}$; ($\times 10^6/\text{mop}$)	8.8	CTM006-01
Fibers $\geq 100\mu\text{m}$; ($\times 10^3/\text{mop}$)	0.46	CTM006-01
Mop Coverage ft ² (m ²)		CTM037-01
S-Curve	347 (32)	
Place and Pull	224 (21)	

Packaging

	EA/OB1	OB1/OB2	OB2/CS	EA/CS	
TASK0500	4	1	12	48	
	EA/OB1	OB1/OB2	OB2/OB3	OB3/CS	EA/CS
TASK0550	1	1	4	10	40

EA = Each, OB1 = Outer Bag 1, OB2 = Outer Bag 2, OB3 = Outer Bag 3, CS = Case

Notes

- The data shown are typical values and should not be used as product specifications.
- Valid product comparisons may only be obtained through side-by-side testing in the same test facility, under similar conditions.
- Current and/or comparison data may be available. Please contact a Contec sales representative for details.
- CTM – Refers to Contec Test Method
- Mop Coverage data is based on mop head applying solution such that the mopped surface is visibly wetted across the full mop path with no dry streaking observed, under controlled conditions. It is the responsibility of the user to determine appropriate coverage to ensure surfaces are visibly wet for the contact time required for their specific solution.

Recycle Symbol Key

PET	
HDPE	
LDPE	
PP	
PAP	