


VK Sponge



The VertiKlean Sponge is a disposable cleanroom sponge that features high sorbency polyester foam laminated to a Polynit wiping material with excellent abrasion resistance. The sponge is laser cut to completely seal the edges. Designed for general cleaning and wiping and is ideal for use in the laboratory. Autoclavable or as a sterile, ready-to-use product.

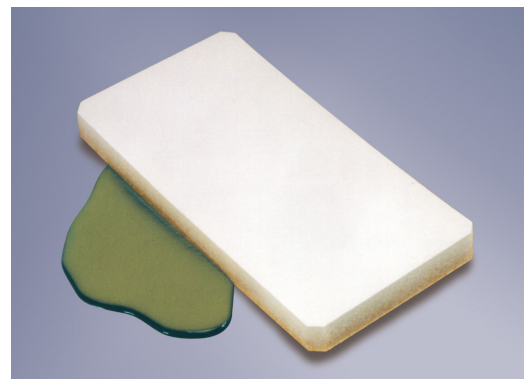


Features	Benefits
High sorbency polyester foam	• High in sorbency
Textured polyester surface	• For more aggressive cleaning tasks

Part No.	Description	Packaging
VKSPONGE-1	VK Sponge Single-ply cleanroom sponge, 8.5" x 4.25" x 0.6" (21.5x11x1.5cm)	8/bag; 12 bags/case
VKST0003	VK Sponge Single-ply cleanroom sponge, 5" x 5" x 0.6" (13x13x1.5cm)	3/bag; 40 bags/case
VKSPONGE-55	VK Sponge Single-ply cleanroom sponge, 5" x 5" x 0.6" (13x13x1.5cm)	12/bag; 4 bags/case

Product Information

Material	Knitted polyester fabric/ 60ppi polyester foam
Construction	Multi-layer; flame bonded
Packaging Materials	Outer bags (OB1, OB2), low density polyethylene (LDPE)  Case (CS), corrugated fiberboard (PAP) 

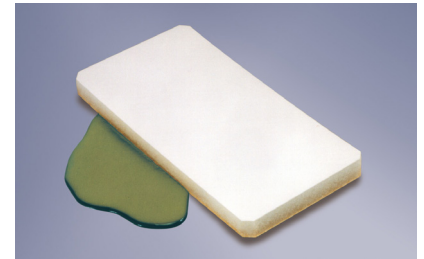

Technical Data






Attribute (units)	Typical Value	Test Method
Sponge weight, dry; (g/sponge)	11.3	Contec Method
Sorbent capacity; (mL/sponge)	172.4	
Non-volatile residue, NVR		IEST-RP-CC004.2, Sec. 6.1.2
In deionized water; (g/sponge)	0.004	
In isopropanol; (g/sponge)	0.006	
Particles, readily releasable		
P ≥ 0.5µm; (x10 ⁶ /sponge)	0.229	IEST-RP-CC004.2, Sec. 5.1
Fibers > 100µm; (x10 ³ /sponge)	0.013	IEST-RP-CC004.2, Sec. 5.2

Packaging

	OB1/OB2	OB2/CS	EA/CS	
VKSPONGE-55	12	4	48	
	EA/OB1	OB1/OB2	OB2/CS	EA/CS
VKSPONGE-1	8	3	4	96
VKST0003	3	4	10	120

EA = Each, OB1 = Outer Bag 1, OB2 = Outer Bag 2, CS = Case

Recycle Symbol Key

PET	
HDPE	
LDPE	
PP	
PAP	

Notes

- The data shown are typical values and should not be used as product specifications.
- Valid product comparisons may only be obtained through side-by-side testing in the same test facility, under similar conditions.
- Current and/or comparison data may be available. Please contact a Contec sales representative for details.

Test Methods:

- CTM Contec Test Method
- IEST-RP-CC004.3 Evaluating Wiping Materials Used in Cleanroom and Other Controlled Environments, Institute of environmental Sciences and Technology, Rolling Meadows IL.