## CONSTIX® Sealed Foam Swab SF-6

## Flexible tip sealed foam swab


CONSTIX® SF-6 sealed foam swab consists of 100 PPI polyurethane foam adhesive-bonded to a flexible nylon tip. The tip is mechanically secured within a tubular polypropylene handle.

The polyurethane foam head provides good particle entrapment for removal and solvent compatibility. The absorbant foam enables solvents, such as isopropanol and ethanol, to be readily sorbed for applications involving solvent delivery or removal.

Though compatible with many common solvents, the SF-6 is not recommended for use with ketones such as acetone or MEK.

Features	Benefits
Flexible nylon tip	Allows for a softer application or removal
Polyurethane foam head	Provides good particle entrapment and solvent compatibility

Part No.	Description	Size	Packaging
SF-6	CONSTIX Sealed foam swab	Head dimension: $0.3" \times 0.8"$ (7.6 x 20.3 mm) Handle diameter: $0.12$ (3.0 mm) Total length: $4.5"$ (114.3 mm)	500/case

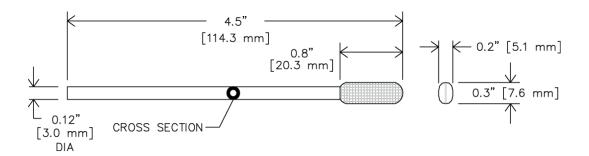

PDSS011 | 091224

Copyright © 2024 Contec, Inc. All rights reserved.



Product Information				
Head material	100 PPI closed-cell polyurethane foam			
Handle material	Polypropylene handle with nylon tip			
Construction	• Epoxy adhesive of foam to tip; tip mechanically secured in tubular handle			
Packaging materials	Outer bags (OB1, OB2): low density polyethylene (LDPE)  Case (CS): corrugated fiberboard (PAP)			
Environment	• ISO 5-8 Grade C/D			

Recycle Symbols

PET 1









Packaging	EA/OB1	OB1/OB2	OB2/CS	EA/CS
SF-6	50	10	1	500

EA = each; OB = outer bag; CS = case