

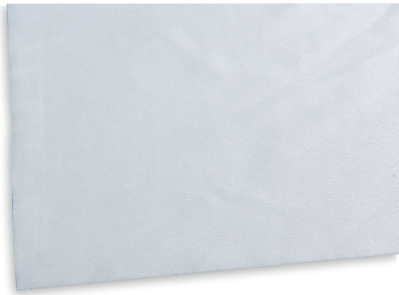
Anticon® Sterile Gold™ Wipes

100% no-run interlock knit polyester with sealed edges and increased sorbency


Anticon® Sterile Gold™ Wipes are a sterile version of Anticon® Gold HeavyWeight™ wipes. Contec's Anticon Gold HeavyWeight wipes are made from 100% continuous filament polyester with a double-knit no-run interlock construction. The proprietary sealed edges reduces the amount of fibers released from the wipe. The wipes are cleanroom laundered and exhibit very low particle and fiber counts, helping to minimize contamination. These wipes are ideal for use in the most critical of cleanroom environments. Using patented textile technology Anticon Sterile Gold Wipes achieve superior capacity with a quick sorption rate. Ideal for disinfectant and solvent application and wiping to dry.



Anticon Sterile Gold wipes are ideal for use in the most critical aseptic environments. Anticon Sterile Gold is conveniently packaged in easy tear bags containing only 20 wipes per package to eliminate wastage. Anticon Sterile Gold is sterilized via gamma irradiation to a sterility assurance limit of 10⁻⁶ and a certificate of irradiation is provided with each shipment.

These wipes meet the requirements of USP<797> and IEST-CC-RP004.4 for “non-shedding, low-lint, lint-free wipes”.



Features	Benefits
100% continuous filament polyester	• Specially processed for superior cleanliness and sorbency
High sorptive capacity	• Decreases the number of wipes required making it an excellent choice for wiping and absorbing spills in critical cleanroom environments
Sealed edges	• Reduces particle and fiber generation
Gamma irradiated to a Sterility Assurance Level of 10 ⁻⁶ SAL	• Ideal for use in aseptic environments

Part No.	Description		Size	Packaging
492226-942	Anticon Sterile Gold Wipes, Flat stacked		12" x 12" (305 x 305 mm)	20/bag; 20 bags/case

Product Information	
Material	100% polyester
Construction	Interlock knit
Packaging materials	Outer bags (OB1, OB2), low density polyethylene (LDPE)  Case (CS), corrugated fiberboard (PAP) 
Environment	ISO 3-8 Grade A/B



Technical Data		
Attribute (units)	Typical Value	Test Method
Basis weight, nominal; (g/m²)	140	Contec Method
Sorbent capacity; (mL/m²)	505	IEST-RP-CC004.3, Sec. 8.1
Sorptive rate; (seconds)	<1	
Non-volatile residue, NVR		IEST-RP-CC004.3, Sec. 7.1.1
In deionized water; (g/m²)	0.003	
In isopropyl alcohol; (g/m²)	0.003	
Specific ions		IEST-RP-CC004.3, Sec. 7.2.2
Sodium; (ppm)	0.022	
Chloride; (ppm)	0.007	
Particles, readily releasable		
Particles ≥ 0.5µm; (x10⁶/m²)	10.7	IEST-RP-CC004.3, Sec. 6.1.3
Fibers ≥ 100µm; (x 10³/m²)	0.085	IEST-RP-CC004.3, Sec. 6.2.2

Recycle Symbols

PET	
HDPE	
LDPE	
PP	
PAP	

Packaging	EA/OB1	OB1/OB2	OB2/CS	EA/CS
492226-942	20	5	4	400

EA = each; OB = outer bag; CS = case

Notes

- a) The data shown are typical values and should not be used as product specifications.
- b) Valid product comparisons may only be obtained through side-by-side testing in the same test facility, under similar conditions.
- c) Current and/or comparison data may be available. Please contact a Contec sales representative for details.

Test Methods:

- 1. CTM = Contec Test Method
- 2. IEST-RP-CC004.3 = Evaluating Wiping Materials Used in Cleanroom and Other Controlled Environments, Institute of Environmental Sciences and Technology, Rolling Meadows IL